




Grease for food-Industry equipments (G011)

This product is ideal for maintenance and cleaning equipment and utensils in food environment. If the grease enters in contact with food, don't worry! The grease is specifically certified.

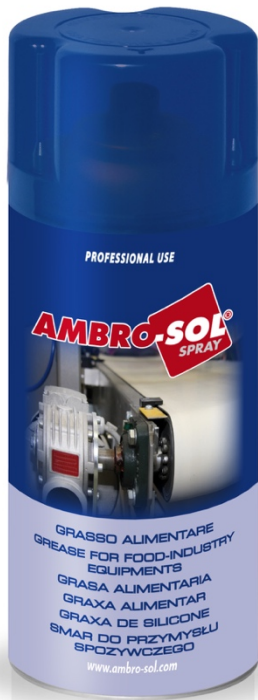

HOW TO USE: shake and spray directly on the surface from a distance of 15 – 25 cm. The product could be sprayed also whit straw (posted in a multi straw cap).

MODALITY OF STORAGE

Before using: stock the product in a dry location and don't stock it with a temperature under zero degrees and over 45°C, after the use, keep containers closed. In the original package, the product can be conserved for 24 months.

After the first usage: conserve in a fresh and dry location, away from hot spring. Keep out of reach of children.

Hazards identification:

H222	Extremely flammable aerosol.
H229	Pressurized container: may burst if heated.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H412	Harmful to aquatic life with long lasting effects.

This information, even if reliable, must be considered only approximate. The usage don't imply our responsibility, included the violation of many license. Before using, the users have to verify the suitability of the product for the specific use.

Quantity	400 ml
Barcode	EAN13: 8034108892283
Confection	12 pz

FOOD-INDUSTRY EQUIPMENTS GREASE – Colorless and purified grease suitable for accidental food contact. Lubricant with wide range of applications for the food industry, for the ordinary and extraordinary maintenance of machines and tools which may accidentally come into contact with food. Ideal for lubrication of equipment for the preparation and packaging of food: slides, grids, transport, slicers, knives and saws, stoves, refrigerators. Protects chrome parts and seals from vapors and / or cleaning agents used for cleaning.

Technical Specifications:

Aspect	Cylinder containing under pressure fluid
Color	Transparent
Odour	Odourless
Relative density	a 20°C 0,66 ÷ 0,70 g/ml
Flash point	Low.0° C
Pressure at 20°C	4/6 bar
Sliding/Pour point	< - 10°C
Penetration at 25°C	220 - 250 mm/10
Certification G.Beslux Caplex M-1 Atox	Cat. Code H1 - NSF reg. N° 025696