




Graphite grease (G019)

Graphite is a mineral and a good electric driving. It has an high fusion temperature. In version of lubricant grease, it's perfect for maintenance and release of machinery and machine of heavy industry.

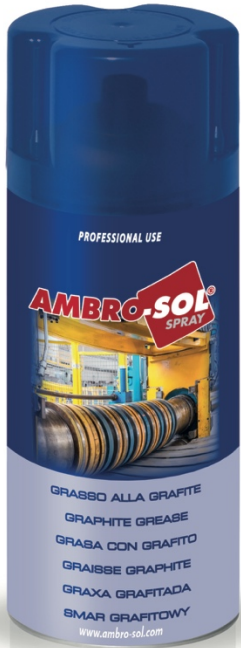

HOW TO USE: shake and spray directly on the surface from a distance of 15 – 25 cm. The product could be sprayed also whit straw (posted in a multi straw cap).

Quantity	400 ml
Barcode	EAN 13: 8034108893662
Confection	12 pz

GRAPHITE GREASE – Special grease mixed with special substances that enhance the multi-functionality of the product. It has exceptional adhesion properties, water resistance, anti-corrosion, wear-resistance and prolonged lubricant film, even in the most hard conditions. It is suitable for construction equipment, agricultural, construction, road and heavy industries, to lubricate joints, pins, bushings, guides, sliding surfaces, bearings, etc..

Technical Specifications:

Aspect	Cylinder containing under pressure fluid
Color	Graphite Black
Odour	Characteristic of solvent
Relative density	a 20°C 0,66 ÷ 0,70 g/ml
Flash point	Low. 0° C
Pressure at 20°C	4/6 bar
Consistency	NLGI EP2
Penetration at 25°C 0.1 mm	265-295
Drip point	+ 180 °C
Application temperature	-40°C - +400°C (peak)

MODALITY OF STORAGE

Before using: stock the product in a dry location and don't stock it with a temperature under zero degrees and over 45°C, after the use, keep containers closed. In the original package, the product can be conserved for 24 months.

After the first usage: conserve in a fresh and dry location, away from hot spring. Keep out of reach of children.

Hazards identification:

H222	Extremely flammable aerosol.
H229	Pressurized container: may burst if heated.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness
H411	Toxic to aquatic life with long lasting effects

This information, even if reliable, must be considered only approximate. The usage don't imply our responsibility, included the violation of many license. Before using, the users have to verify the suitability of the product for the specific use.