




## Ceramic Grease 400 ml (G024)

Grease with special properties E.P., lubricant ideal for situations with high temperatures: it withstands up to 1,200 °, avoiding unpleasant episodes of blocking.

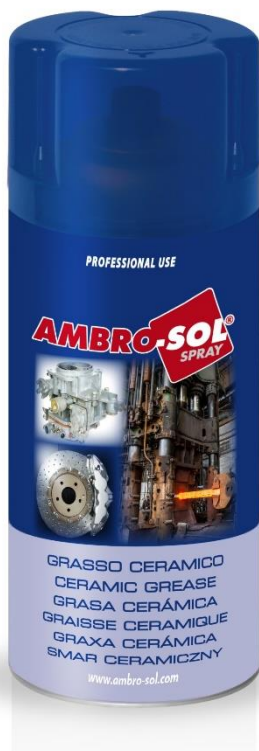

**HOW TO USE** Shake can well. Spray directly on the surface-treated from a distance of of 15-25 cm. The product can also be provided with a straw (inserted in a multi-straw cap).

Quantity	400 ml
Barcode	EAN 13: 8034108894553
Packaging:	12 pcs

**CERAMIC GREASE** - Ceramic based grease for high temperatures (1200 °C) that is preferably applied to parts that are exposed to high pressures or at very high temperatures. It has a high lubricity, protection against moisture and a high anti-corrosive power. This ceramic paste based and metal-free spray, permanently removes squeaking and creaking, suitable for ABS and ASR brakes, oxygen sensors, brake parts in general.

### TECHNICAL DATA:

Aspect	Pressurized container
Color	white
Odour	Typical of solvent
Relative density	at 20°C 0,64 ÷ 0,68 g/ml
Flash point	Inf. 0° C
Pressure at 20°C	4/6 bar
Consistency	NLGI EP 2
Penetration at 25°C	300 - 305 mm/10
Dripping point	>300°C ASTM D566
Application temperature	-40 °C - 1200°C/1500 °C (peaks, on dry residual without air contact)

#### MODALITY OF STORAGE

Before using: stock the product in a dry location and don't stock it with a temperature under 0° degrees and over 45°C, after the use, keep containers closed. In the original package, the product can be conserved for 24 months. After the first usage: conserve in a fresh and dry location, away from hot spring. Keep out of reach of children.

#### Hazards identification:

- H222 Extremely flammable aerosol.
- H229 Pressurized container: may burst if heated.
- H336 May cause drowsiness or dizziness.
- H315 Cause skin irritation
- H411 Toxic to aquatic life with long last effects

This information, even if reliable, must be considered only approximate. The usage don't imply our responsibility, included the violation of many license. Before using, the users have to verify the suitability of the product for the specific use.