




Dry PTFE lubricant agent (L051)

This spray creates a PTFE dry coat on the treated part; it doesn't leave bots and it doesn't hold dust. Able to resist to very high and very low temperatures.

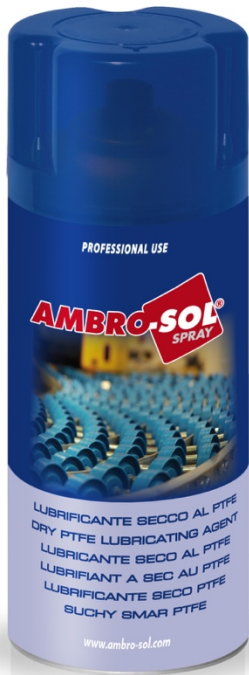

Quantity	400 ml
Barcode	EAN 13: 8034108890098
Confection	12 pz

DRY PTFE LUBRICANT – Dry, water-repellent, anti-adhesive lubricant. Does not withhold dust and does not stain. Application forms a dry and flexible layer of PTFE on the part treated that adheres tightly to metal, wood, and plastic, etc. Temperature-resistant between -80°C and +260°C. For protection against corrosion. Ideal for drive chains, threads, rollers, belts, guides and heavy-duty tools, etc.

Technical Specifications:

Aspect	Cylinder containing under pressure fluid
Color	Light white
Odour	Characteristic of solvent
Relative density	a 20°C 0,61 ÷ 0,65 g/ml
Flash point	0° C
Pressure at 20°C	4/6 bar
Melting point	ASTM D4591 deg C 334,70
PTFE Average particle size	INTERN micron 3,0 +/- 2
Specific gravity	ASTM D4894 g/cm ³ 2,18 +/- 0,05
Melting point PTFE	327°C \cap 340 °C
Maximum temperature	400°C(peaks)

HOW TO USE: Shake the cylinder at least one minute. Dispense the product from a distance of about 20 cm. Wait the distension of the product on the surface. If necessary, repeat the operation.

MODALITY OF STORAGE

Before using: stock the product in a dry location and don't stock it with a temperature under 0° degrees and over 45°C, after the use, keep containers closed. In the original package, the product can be conserved for 24 months.

After the first usage: conserve in a fresh and dry location, away from hot spring. Keep out of reach of children.

Hazards identification:

H222	Extremely flammable aerosol.
H229	Pressurized container: it may burst if heated.
H315	Causes skin irritation.
H336	May cause drowsiness or dizziness.
H411	Toxic to aquatic life with long lasting effects.

This information, even if reliable, must be considered only approximate. The usage don't imply our responsibility, included the violation of many license. Before using, the users have to verify the suitability of the product for the specific use.