




Active unlocking with graphite (S158)

Unlocking spray that acts in deep with the properties of graphite, a mineral and electric conductor. This spray is ideal for professional uses, for example by mechanicals, auto electrician and auto body repairman.

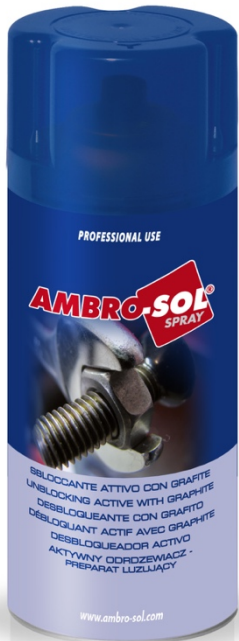

Quantity	400 ml
Barcode	EAN 13: 8034108892337
Confection	12 pz

ACTIVE UNLOCKING – Technical professional product with high penetrating power, it reaches deep into the layers of rust, dry grease, coal deposits or metal powder, canceling cohesion. The micro particles of lamellar graphite penetrating into the interstices and being resistant to high temperatures and extreme loading conditions, allow the unblocking action even when the oil-fat phase has been degraded by the combustion of the heat generated by the friction. It unlocks rusted bolts and bolts, fittings, valves, car mufflers and it permits the unlock of flanges, threaded rods, pistons, chains etc..

Technical Specifications:

Aspect	Cylinder containing under pressure fluid
Color	Light brown
Odour	Characteristic of solvent
Relative density	at 20°C 0,68 ÷ 0,71 g/ml
Flash point	Low.0° C
Pressure at 20°C	4/6 bar
Freezing point	< -66°C (liquid base)
Boiling point	176°C circa (liquid base)
Flash point	40 °C (liquid base)
Vapor tension	> 5 bar (20°C)
Viscosity	< 3 cSt - 15 cSt 40°C (oily base)
Solubility	Insoluble in water
Operating time	-60°C / +220 °C c.a.

HOW TO USE Shake well before use. Spray the product on the part to be treated, leave for a few minutes, then in the case of rusted parts proceed to unlock, with resistant incrustations repeat. The product can also be sprayed with drinking straw Modular (inserted in the cap multi-straw).
PRECAUTIONS: Do not apply to equipment in tension. Do not apply to materials overheated.

MODALITY OF STORAGE

Before using: stock the product in a dry location and don't stock it with a temperature under 0° degrees and over 45°C, after the use, keep containers closed. In the original package, the product can be conserved for 24 months.
 After the first usage: conserve in a fresh and dry location, away from hot spring. Keep out of reach of children.

Hazards identification:

H222 **Extremely flammable aerosol.**
 H229 **Pressurised container: may burst if heated.**
 H336 **May cause drowsiness or dizziness.**

This information, even if reliable, must be considered only approximate. The usage don't imply our responsibility, included the violation of many license. Before using, the users have to verify the suitability of the product for the specific use.