



Multipurpose Acrylic Paints RAL 600 ml (V600)

This is the maxi format for this multipurpose spray; it has different uses, gives new brilliance to all types of surfaces and dries rapidly. It's available in some black and white tones.

MULTIPURPOSE ACRYLIC PAINT It's a bright enamel for indoors and outdoors, for multiple usage. It dries to the touch in roughly 15 minutes and dries fully in roughly 45 minutes. Application: wood surfaces, metal, glass, ceramic, plastering, doors, chairs, furniture, frames, knick-knacks, radiators and a thousand other objects.



Product subject to directive C.O.V.

Subcategory: Special finishes
Limit value COV: 840 g/Liter
Actual maximum content: 640 g/Liter

FIELDS OF APPLICATION:

Wood surfaces, metal surfaces as iron, aluminum, steel, glass and plastics.

Technical specifications:

Quantity	600 ml
Packing	12 Pz.
Aspect	Cylinder containing under pressure fluid
Chemical nature	Very fast drying acrylic paints
Colour	Various
Odour	Characteristic of solvent
Relative density	At 20°C 0,72 ÷ 0,76 g/ml
Flash point	Low. 0° C
Writing on spray bottom	Barcode, production date, product name
Pressure	at 20°C 5,5 ± 1 bar
Pressure	at 50°C 8,0 ± 0,5 bar
Viscosity Ford cup	From 10" to 13"
Dry residual in spray	From 15% to 22%
Granulometry grindometer	Bottom Scale 0 a 2 Micron
Gloss	From 7 to 95 Gloss (Glossmeter angle 60°)
Thickness 1 hand	13 Micron
Thickness 3 hands	36 Micron
Resistance temperature	-10°C / +100°C (Peak 120° C)
Drying time t=20°:	Out dust 10 minutes
	Dry to touch 15 minutes
	Dry in depth 22 hours
Security cap child-proof patented and registered	
Token with color reference	
It's possible have different type of actuators for various effects and employ	

FOR A PROFESSIONAL RESULT, CLEAN ACCURACY THE WORKPIECE AND APPLY BEFORE RAL COLOR THE PROPER PRIMER ACCORDING TO SURFACES TYPE:

Iron surfaces: enamel anti-rust V400PAST.1, V400PAST.9, V400PAST.10, V400STUCCO, V400PRIMER.3, V400PRIMER.4)

Galvanized surfaces: galvanized sheets primer (V400PRIMER.5)

Metallic surfaces and light alloy: Anchor metals and alloy primer (V400PRIMER.1)

Plastic surfaces: anchor primer for plastics (V400PRIMER.2)

Iron surfaces and metallic exposed to higher risk of oxidation: Zincs (Z350, Z351, Z355, Z353, Z352, Z358, Z356, and Z359)

HOW TO USE:


1. Open the cap:
break 3 safety seals-clips to open the cap.



2. Shake well before use the spray at least 1 minute, until the internal balls can move freely. It's recommended to shake the product even during use.



3. Spray the product:

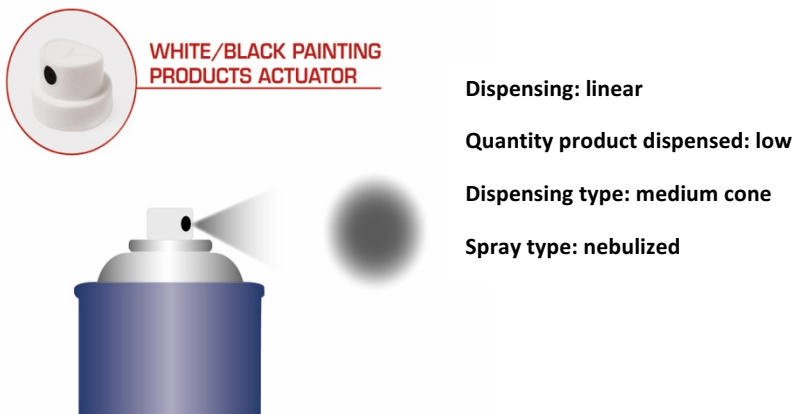

4. Practical advice for use:

-Apply a first hand/coat light to improve coverage and adherence, to reduce the possibility of dropping. Apply from a distance of 20 cm.

-after a few moment apply a second horizontal hand/coat immediately followed by a third vertical hand-coat.

-Let dry a few minutes.

- After use, it's advisable to spray for 2/3 seconds with the spray upside down, to avoid the block of the actuator.

-After 24h, proceed with the normal use of painted piece.

MODALITY OF STORAGE

Before using: store the product in a dry location and don't stock it with a temperature under zero degrees and over 45°C, after the use, keep containers closed. In the original package, the product can be conserved for 24 months.

After the first usage: conserve in a fresh and dry location, away from hot spring. Keep out of reach of children.

Hazards identification:

H222	Extremely flammable aerosol.
H229	Pressurized container: may burst if heated.
H319	Causes serious eye irritation.
H336	May cause drowsiness or dizziness
EUH066	Repeated exposure may cause skin dryness or cracking.

This information, even if reliable, must be considered only approximate. The usage don't imply our responsibility, included the violation of many license. Before using, the users have to verify the suitability of the product for the specific use.