

## Finishes bodywork enamel (V400CAR) (V400FAS) (V400SCOCCA)

This is another amazing product of Ambro-Sol "Paint" line. It gives a new splendor to the car body and to the motorbike body. It's ideal for every type of plastic, it resists to scratches and it dries rapidly. .

**FINISHES BODYWORK ENAMEL** - Professional acrylic enamel resistant to scratches, alcohol and gasoline. Ideal for painting rims and wheels covers of any material of motorcycles and cars. Paint particularly suitable for repaint/renew bumpers, side panels, spoilers. It applies quickly and with easily. Product suitable for any type of plastic, it does not need primers and dries within a few minutes.



**Directive 2004/42/CE: C.O.V.**  
 Under category: Special finishing  
 Limit value COV: 840 g/Liter  
 Max effective contents: 640 g/Liter

#### FIELDS OF APPLICATION:

Wood surfaces, metal surfaces as iron, aluminum, steel, glass and plastics.

### Technical specifications:

Quantity	400 ml
Confection	6 Pz.
Aspect	Cylinder containing under pressure fluid
Chemical nature	Very fast drying acrylic paints
Colour	Various
Odour	Characteristic of solvent
Relative density	0,72 ÷ 0,76 g/ml (Underbody 0,73 ÷ 0,77)
Flash point	Low. 0° C
Writing on spray bottom	Barcode, production date, product name
Pressure	at 20°C 5,5 ± 0,5 bar
Pressure	at 50°C 8,0 ± 0,5 bar
Viscosity Ford cup	From 10" to 13"
Dry residual in spray	From 3% to 32%
Granulometry grindometer	Bottom Scale 0 a 2 Micron
Gloss	From 7 to 95 Gloss (Glossmeter angle 60°)
Depth 1 hand	13-24 Micron
Depth 3 hands	36-54 Micron
Resistance temperature	-10°C / +100°C (Peak 120° C)
Drying times:	Out dust 10 minutes
	Dry to touch 15 minutes
	Dry in depth 22 hours
Security cap child-proof patented	
Token dye reference	
Is possible have different type of actuators for various effects and employ	

**ADVICE FOR USE:** CLEAN ACCURACY THE SURFACE. THE SURFACE MUST BE COMPLETELY DRY, AND THEN CHOOSE THE RIGHT PRODUCT TO SATISFY YOUR NEEDS: UNDERBODY, SPOILERS, ALUMINIUM TIRES.

## ISTRUCTIONS FOR USE:

1. Open the cap:  
break 3 safety seals-clips to open the cap.

2. Shake well before use the spray at least 1 minute,  
until the internal balls can move freely.  
It's recommended to shake the product even during  
use.




Break three safety seals clips to open the cap.



3. Spray the product:

4. Pratical advice for use:

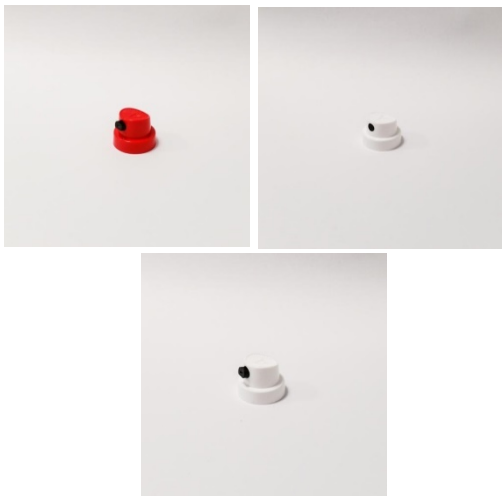

**Actuator according to the product.**

**Dispensing: Linear or adjustable**

**Quantity product dispensed from minimal to extensive**

**Dispensing type: narrow cone to large**

**Spray type: nebulized**

-Apply a first hand/coat light to improve coverage and adherence, to reduce the possibility of dropping. Apply from a distance of 20 cm.

-after a few moment apply a second horizontal hand/coat immediately followed by a third vertical hand-coat.

-Let dry a few minutes.

- After use, it's advisable to spray for 2/3 seconds with the spray upside down, to avoid the block of the actuator.

-After 24h, proceed with the normal use of painted piece.

## MODALITY OF STORAGE

Before using: stock the product in a dry location and don't stock it with a temperature under zero degrees and over 45°, after the use, keep containers closed. In the original package, the product can be conserved for 24 months.

After the first usage: conserve in a fresh and dry location, away from hot spring. Keep out of reach of children.

**Hazards identification:**

H222	<b>Extremely flammable aerosol.</b>
H229	<b>Pressurized container: may burst if heated.</b>
H319	<b>Causes serious eye irritation.</b>
H336	<b>May cause drowsiness or dizziness</b>
EUH066	<b>Repeated exposure may cause skin dryness or cracking.</b>

This information, even if reliable, must be considered only approximate. The usage don't imply our responsibility, included the violation of many license. Before using, the users have to verivy the suitability of the product for the specific use.