



Fluo diamonds effect enamel 400 ml (V400DIAM)(V400FLUO)(V400RAD)(V400PAST.2)

Do you want to donate brilliance to surfaces and to diverse objects? Then, this spray is for you! It's ideal for materials of houses and buildings; it dries rapidly and acts in depth.

FLUO DIAMONDS EFFECT ENAMEL – It is a special painting for decoration and protection of all internal and external surfaces of heaters, radiators, ceramic surfaces and any household appliance such as washing machines, dishwashers, refrigerators and so on. Resistant to 120° C. It is a special enamel for indoor that makes surfaces bright and fluorescent visible in the distance, even in the absence of light. It is a special enamel pearlescent “glitters” based that gives light reflections to the most imaginative decorations. It is ideal for decorating Mountain bikes, mopeds, helmets, masks, frames, decorations, ornaments, and so on. It dries to the touch in roughly 15 minutes and dries fully in roughly 45 minutes.



Directive 2004/42/CE: C.O.V.
Under category: Special finishing
Limit value COV: 840 g/Liter
Max effective contents: 640 g/Liter

FIELDS OF APPLICATION:

Wood surfaces, metal surfaces as iron, aluminum, steel, glass and plastics.

Technical specifications:

| | |
|---|--|
| Quantity | 400 ml |
| Confection | 6 Pz. |
| Aspect | Cylinder containing under pressure fluid |
| Chemical nature | Very fast drying acrylic paints |
| Colour | Various |
| Odour | Characteristic of solvent |
| Relative density | At 20°C 0,72 ÷ 0,76 g/ml |
| Flash point | Low. 0° C |
| Writing on spray bottom | Barcode, production date, product name |
| Pressure | at 20°C 5,5 ± 1, bar |
| Pressure | at 50°C 8,0 ± 0,5 bar |
| Viscosity Ford cup | From 10" to 13" |
| Dry residual in spray | From 15% to 22% |
| Granulometry grindometer | Bottom Scale 0 a 2 Micron |
| Gloss | From 10 to 95 Gloss (Glossmeter angle 60°) |
| Thickness 1 hand | 13-18 Micron |
| Thickness 3 hands | 36-40 Micron |
| Resistance temperature | -10°C / +120°C (Peak 130° C) |
| Drying times: | Out dust 10 minutes |
| | Dry to touch 15 minutes |
| | Dry in depth 22 hours |
| Security cap child-proof patented | |
| Token dye reference | |
| Is possible have different type of actuators for various effects and employ | |

FOR A PROFESSIONAL RESULT, CLEAN ACCURACY THE WORKPIECE BEFORE THE PAINTING.

THE SPECIAL FINISH OF THESE SPECIAL EFFECTS OFFERS NO RESISTENCE TO ABRASION, THE PAINTED SURFACES SHOULD'T BE PLACED OUTSIDE, HANDLED OR OVER PAINTED.

THE FLUORESCENT COLOR TO GET A BETTER EFFECT FLUO, IS ADVISABLE TO SPRAY ON WHITE SURFACES PREPARED WHIT ACRYLIC PAINT MAT WHITE (V400PAST.4), OR WHITE PUTTY (V400STUCCO).

INSTRUCTIONS FOR USE:

1. Open the cap:
break 3 safety seals-clips to open the cap.




Break three safety seals clips to open the cap.

2. Shake well before using the spray at least 1 minute, until the internal balls can move freely. It's recommended to shake the product even during use.



3. Spray the product:

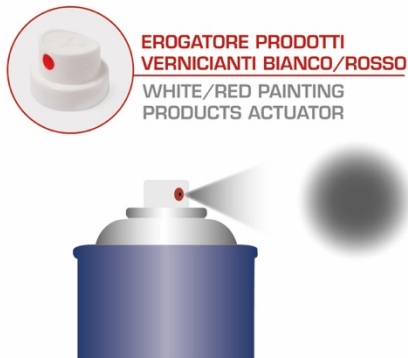

Dispensing: linear

Quantity product dispensed:
low/medium

Dispensing type: medium cone

Spray type: nebulized

4. Practical advice for use:

-Apply a first hand/coat light to improve coverage and adherence, to reduce the possibility of dropping. Apply from a distance of 20 cm.

-after a few moment apply a second horizontal hand/coat immediately followed by a third vertical hand-coat.

-Let dry a few minutes.

- After use, it's advisable to spray for 2/3 seconds with the spray upside down, to avoid the block of the actuator.

-After 24h, proceed with the normal use of painted piece.

MODALITY OF STORAGE

Before using: stock the product in a dry location and don't stock it with a temperature under 0° degrees and over 45°C, after the use, keep containers closed. In the original package, the product can be conserved for 24 months.

After the first usage: conserve in a fresh and dry location, away from hot spring. Keep out of reach of children.

Hazards identification:

| | |
|--------|--|
| H222 | Extremely flammable aerosol. |
| H229 | Pressurized container: may burst if heated. |
| H319 | Causes serious eye irritation. |
| H336 | May cause drowsiness or dizziness |
| EUH066 | Repeated exposure may cause skin dryness or cracking. |

This information, even if reliable, must be considered only approximate. The usage don't imply our responsibility, included the violation of many license. Before using, the users have to verify the suitability of the product for the specific use.

