



Marker paint 360° (V403)

This product can be used in all position thanks to special supplying valve at 360°. This spray is ideal for professional uses, for example for asphalts and walls, but also for domestic uses, for woods and floors. It's available in different colours.

MARKER PAINT - Spray paint for marking masonry, pavements, asphalt, cement and wood. The product is highly resistant to wear and weathering. Available in fluorescent colors. The product can be used in all position because it has a special "360° valve".

Technical specifications:

Quantity	500 ml
Confection	12 Pz.
Aspect	Cylinder containing under pressure fluid
Chemic nature	Super fast drying paint
Color fluo-pastel	Transparent
Odour	Characteristic of solvent
Relative density	At 20°C 0,70÷ 0,74 g/ml
Writings on the cylinder bottom	Barcode, date of production, name of product
Flash point	Low. 0° C
Pressure	at 20°C 5,5 ± 0,5 bar
Pressure	At 50°C 8,0 ± 0,5 bar
Viscosity Ford Cup	From 28" to 33"
Dry residual in the cylinder	From 30 to 35 %
Overcoating	everytime
Brillance	From 0 to 15 Gloss (60 ° angle gloss meter)
Operating temperature	-10°C / +100°C (Picchi 150° C)
safety cap child-proof patented	
The product is permanent and resistant to UV rays and humidity.	



Directive 2004/42/CE: C.O.V.
 Under category: Special finishing
 Limit value COV: 840 g/Liter
 Max effective contents: 640 g/Liter

FIELDS OF APPLICATION:


Surfaces in wood, surfaces in metal as I fit with iron, aluminum, steel, glass and plastic subjects. steel.

FOR A PROFESSIONAL RESULT, TO CAREFULLY CLEAN THE PIECE TO TREAT.

TO REMOVE THE PRODUCT TO USE THINNER NITRO E/O ACETONE. PRODUCT TO ELEVATED' STRINGINESS.'

HOW TO USE:**1. Open the cap:**

Break the safety seal to open the cap.
Rotate in hourly sense the colored tongue that covers the provider.

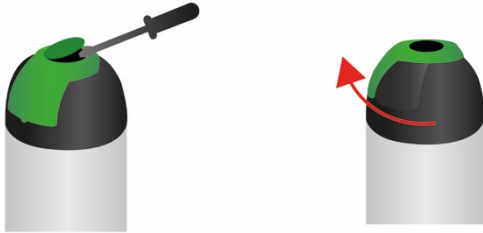

2. Shake emphatically the cylinder for at least 1 minute, up to feel the inside marbles freely stir. It's advised shake desultorily the cylinder during the use.

**3. Distribute the product:**

Dispense at any angle you want.



4. Rotate counterclockwise the colored tab to to protect the provider.

**MODALITY OF STORAGE**

Before using: stock the product in a dry location and don't stock it with a temperature under 0° degrees and over 45°C, after the use, keep containers closed. In the original package, the product can be conserved for 24 months.

After the first usage: conserve in a fresh and dry location, away from hot spring. Keep out of reach of children.

Hazards identification:

H222	Extremely flammable aerosol.
H229	Pressurized container: may burst if heated.
H319	Causes serious eye irritation.
H336	May cause drowsiness or dizziness
EUH066	Repeated exposure may cause skin dryness or cracking.

This information, even if reliable, must be considered only approximate. The usage don't imply our responsibility, included the violation of many license. Before using, the users have to verify the suitability of the product for the specific use.