




Gas leaks detector (W507)

Gas breaks are dreaded, and also really dangerous. For that, Ambro-Sol offers this practical and simple spray: it can be used on tubes, valves, connections, tanks: Thanks to its property of non-flammable product it can be used also on machinery and flammable conductors.

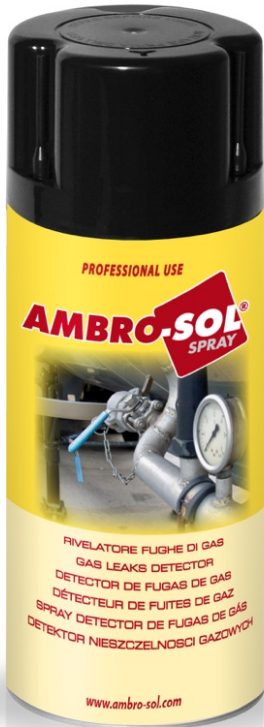

GAS LEAKS DETECTOR – A product with synthetic tense-active agents which can detect leaks of gas or compressed air in pipes, valves, connections, canisters and pressurized tanks. It is no flammable so it can be used to check on gas stoves and mains.

Technical Specifications:

Barcode	EAN: 8034108890524
Quantity	400 ml
Confection	12 Pz.
Aspect	Cylinder containing under pressure fluid
Color	Typical
Odour	odorless
Relative density	a 20°C 0,97 ÷ 1,01 g/ml
Flash point	Not flammable
Pressure at 20°C	7 bar
Operating temperature	>0°C/100°C ca.
PH	7,5-8,5
Boiling range	>100°C
Decomposing temperature	>200°C
Solubility	Water soluble
Biodegradability	92%(H2O compound)
propellent	Nitrogen

HOW TO USE: Shake well before use. Hold the bottle upright and spray from a distance of 20-25 cm on the area to be tested. In case of loss of gas, bubbles or foam will form. The product can also be provided with drinking straw Modular (inserted in multistraw cap). Protect from frost.

MODALITY OF STORAGE

Before using: stock the product in a dry location and don't stock it with a temperature under 5°C degrees and over 45°C, after the use, keep containers closed. In the original package, the product can be conserved for 24 months.

After the first usage: conserve in a fresh and dry location, away from hot spring. Keep out of reach of children.

Hazards identification:

H229 Pressurized container: may burst if heated.

This information, even if reliable, must be considered only approximate. The usage don't imply our responsibility, included the violation of many license. Before using, the users have to verify the suitability of the product for the specific use.